


PLAN FOR LIFT WELL

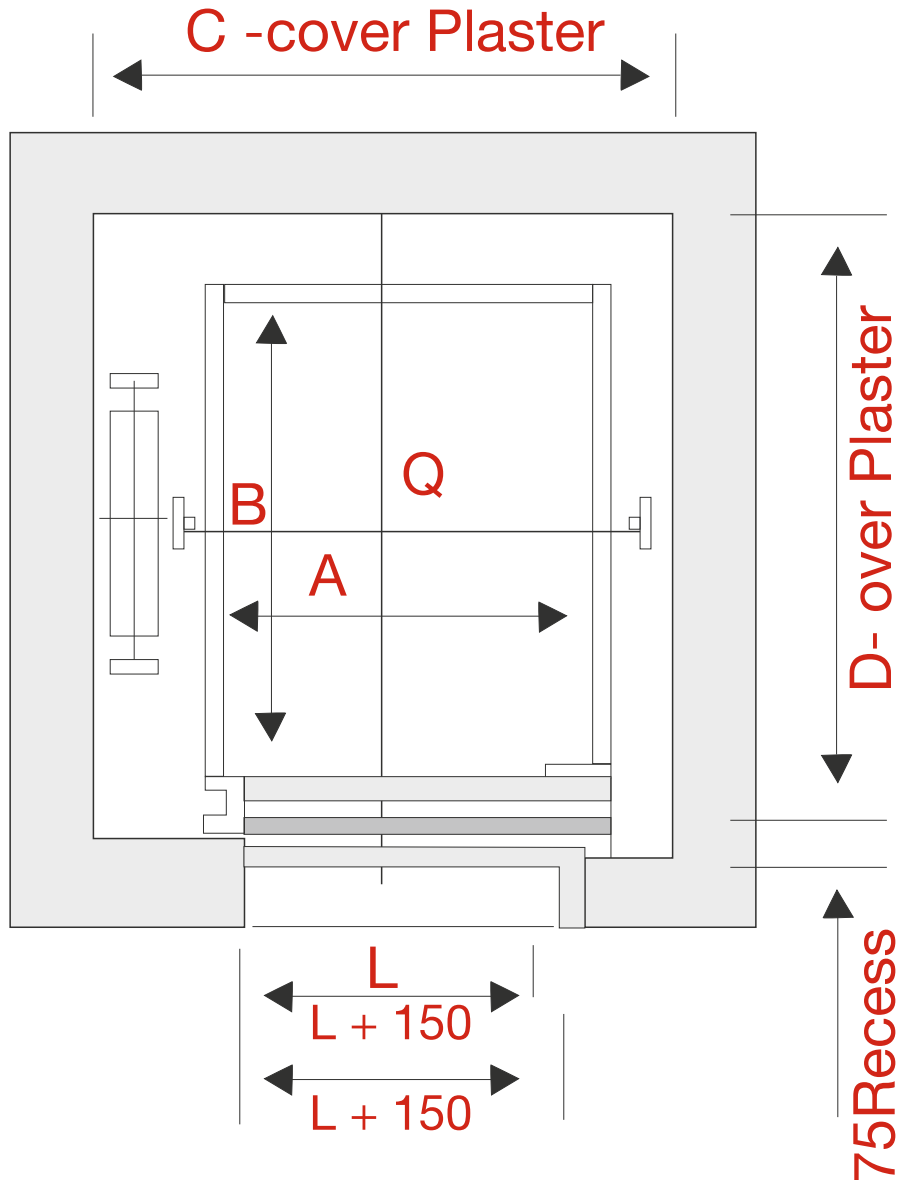

DIMENSIONAL DETAILS : Goods Lift

Capacity	Car Inside		Lift Well		Clear Entrance	Machine Room		Head Room
	(Width)	(depth)	(Width)	(depth)	L	W	E	
Kgs.	A	B	C	D	L	W	E	
500	1100	1200	1900	1500	900	2900	2500	4800
1000	1400	1800	2300	2100	1200	3300	3100	4800
1500	1700	2000	2600	2300	1500	3600	3300	4800
2000	1700	2500	2600	2800	1500	3600	3800	4800
2500	2000	3000	2900	2800	1800	3900	3800	4800
3000	2000	3000	2900	3300	2300	3900	4300	4800
4000	2500	3000	3400	3300	2300	4400	4300	4800
5000	2500	3600	3400	3900	2300	4400	4900	4800

All Dimension are in mm

This is General Data, it may be changed without notice. For more details contact us.

All hoist way wells should be minimum 230 brick 150 mm R.C.C.